
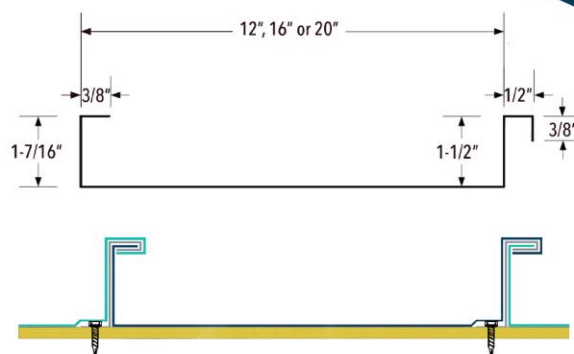


## 1 1/2" MECHANICAL STANDING SEAM



All dimensions are nominal.

### PRODUCT TESTING

- **Uplift Resistance:** UL 580, TAS 110, TAS 125
- **Wind-Driven Rain:** TAS 100
- **Tensile Strength:** ASTM E8
- **Fire Rating:** UL 790
- **Accelerated Coating:** ASTM G152
- **Salt Spray Coating:** ASTM B117
- **Florida Building Code:** Approved HVHZ/Non-HVHZ
- **Miami-Dade County:** Product Control Approved

### PRODUCT SPECIFICATIONS

- **Material:** 22, 24, 26 gauge steel, .032, .040 aluminum, 16 oz. copper
- **Slope:** 2:12 or greater, site-specific available
- **Support:** Wood deck of 15/32" thickness or greater plywood or steel deck
- **Coverage:** 12-inches, 16-inches or 20-inches
- **Finish:** Kynar 500® coating, mill-finished Maxalúme
- **Sustainability:** Energy Star® rated products available
- **Quality:** Keystone Quality Assurance Program, Miami-Dade Quality Assurance Program